


ZIMLED 1200, 930 (BBBL), FLOOD W/ GLASS, BLACK ITAB

- ✓ Soffitto discreto e pulito
- ✓ Disponibile in diverse temperature cromatiche
- ✓ Installazione senza attrezzi
- ✓ Disponibile in bianco, nero e grigio
- ✓ Facile da regolare

TECHNICAL SPECIFICATION

Product Code	303-502-20
Colour	Black
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	1150
Driver	Stand alone, included
EEL	E
Light distribution	Flood
Lightsource	LED COB
Mains input voltage	220-240 V
Measurements A	118
Measurements B	56
Measurements C	61
Mounting	Recessed
Position	355°/80°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions diameter	108
Start Time	Instant
System power W	11
Unit	mm
Weight	0,2

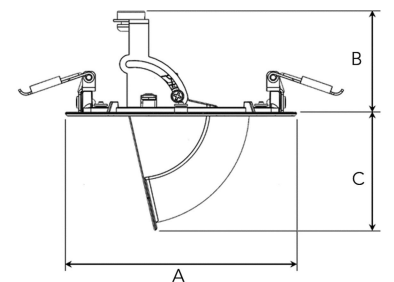

A= 118mm, B= 56mm, C= 61mm

Spot	Medium	Flood	Wide Flood
15°	27°	36°	56°
m	m	m	m
0	0	0	0
1.0	0.26	0.47	0.65
2.0	0.53	0.95	1.30
3.0	0.79	1.42	1.95
4.0			2.60
5.0			3.25
6.0			3.90
7.0			4.55
8.0			5.20
9.0			5.85
10.0			6.50
11.0			7.15
12.0			7.80
13.0			8.45
14.0			9.10
15.0			9.75
16.0			10.40
17.0			11.05
18.0			11.70
19.0			12.35
20.0			13.00
21.0			13.65
22.0			14.30
23.0			14.95
24.0			15.60
25.0			16.25
26.0			16.90
27.0			17.55
28.0			18.20
29.0			18.85
30.0			19.50
31.0			20.15
32.0			20.80
33.0			21.45
34.0			22.10
35.0			22.75
36.0			23.40
37.0			24.05
38.0			24.70
39.0			25.35
40.0			26.00
41.0			26.65
42.0			27.30
43.0			27.95
44.0			28.60
45.0			29.25
46.0			29.90
47.0			30.55
48.0			31.20
49.0			31.85
50.0			32.50
51.0			33.15
52.0			33.80
53.0			34.45
54.0			35.10
55.0			35.75
56.0			36.40
57.0			37.05
58.0			37.70
59.0			38.35
60.0			39.00
61.0			39.65
62.0			40.30
63.0			40.95
64.0			41.60
65.0			42.25
66.0			42.90
67.0			43.55
68.0			44.20
69.0			44.85
70.0			45.50
71.0			46.15
72.0			46.80
73.0			47.45
74.0			48.10
75.0			48.75
76.0			49.40
77.0			50.05
78.0			50.70
79.0			51.35
80.0			52.00
81.0			52.65
82.0			53.30
83.0			53.95
84.0			54.60
85.0			55.25
86.0			55.90
87.0			56.55
88.0			57.20
89.0			57.85
90.0			58.50
91.0			59.15
92.0			59.80
93.0			60.45
94.0			61.10
95.0			61.75
96.0			62.40
97.0			63.05
98.0			63.70
99.0			64.35
100.0			65.00



108mm