



ORION II 2500, 930 (BBBL), FRAME, SPOT W/ GLASS, WHITE

ITAB

- ✓ Soffitto discreto e pulito
- ✓ Illuminazione orientabile fino a 30° in qualsiasi direzione
- ✓ Disponibile in bianco, nero e grigio

TECHNICAL SPECIFICATION

Product Code	300-21061110062
Colour	White
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	2 x 2468
Driver	Stand alone, included
EEL	E
Light distribution	Spot
Lightsources	LED COB
Mains input voltage	220-240 V
Measurements A	280
Measurements B	158
Measurements C	103
Mounting	Recessed
Position	360°/30°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions x	272
Sawing instructions y	150
Start Time	Instant
System power W	2 x 18,4
Unit	mm
Weight	1,5

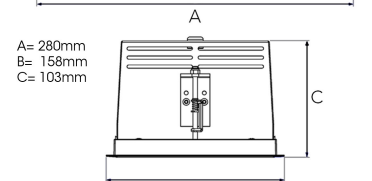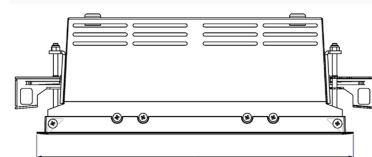

A= 280mm
B= 158mm
C= 103mm

Spot	Medium	Flood	Wide Flood
16°	28°	40°	65°
m	m	m	m
1.0	1.0	1.0	1.0
2.0	2.0	2.0	2.0
3.0	3.0	3.0	3.0
0.28	0.50	0.73	1.28
0.56	1.00	1.46	2.56
0.83	1.51	2.18	3.84



272 x 150mm