


FLEX I 3000, 930 (BBBL), WIDE FLOOD, BLACK

ITAB

- ✓ Soffitto dal design moderno, essenziale e pulito
- ✓ Disponibile in vari pacchetti di lumen
- ✓ Installazione senza attrezzi
- ✓ Disponibile in bianco, nero e grigio
- ✓ Retraibile e girevole

TECHNICAL SPECIFICATION

| | |
|---------------------------|-----------------------|
| Product Code | 306-523-20 |
| Colour | Black |
| Control | On/off |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 2560 |
| Driver | Stand alone, included |
| EEL | E |
| Light distribution | Wide flood |
| Lightsource | LED COB |
| Mains input voltage | 220-240 V |
| Measurements A | 202 |
| Measurements B | 179 |
| Measurements C | 202 |
| Measurements D | 70 |
| Mounting | Recessed |
| Position | 360°/60° |
| Lifetime | L80 B10, 50.000h |
| Protection | IP 20, class III |
| Sawing instructions x | 177 |
| Sawing instructions y | 191 |
| Start Time | Instant |
| System power W | 20,7 |
| Unit | mm |
| Weight | 1.1 |

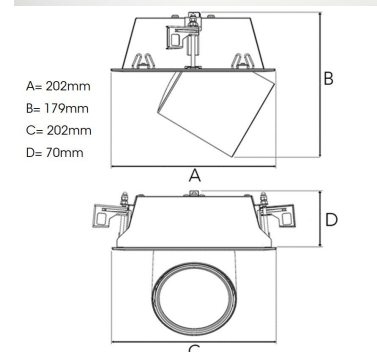

A= 202mm
B= 179mm
C= 202mm
D= 70mm

| Spot | | Medium | | Flood | | Wide Flood | |
|------|------|--------|------|-------|------|------------|------|
| | 14° | | 27° | | 38° | | 56° |
| m | ø | m | ø | m | ø | m | ø |
| 1.0 | 0.25 | 1.0 | 0.48 | 1.0 | 0.69 | 1.0 | 1.07 |
| 2.0 | 0.49 | 2.0 | 0.95 | 2.0 | 1.39 | 2.0 | 2.14 |
| 3.0 | 0.74 | 3.0 | 1.43 | 3.0 | 2.08 | 3.0 | 3.22 |



177 x 191mm