



ZIMLED 1200, 930 (BBBL), SPOT W/ GLASS, BLACK

ITAB

- ✓ Techo discreto y de aspecto limpio
- ✓ Disponible en diferentes temperaturas de color
- ✓ Instalación sin herramientas
- ✓ Disponible en blanco, negro y gris
- ✓ Fácil de ajustar

TECHNICAL SPECIFICATION

Product Code	303-500-20
Colour	Black
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	1150
Driver	Stand alone, included
EEL	E
Light distribution	Spot
Lightsource	LED COB
Mains input voltage	220-240 V
Measurements A	118
Measurements B	56
Measurements C	61
Mounting	Recessed
Position	355°/80°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions diameter	108
Start Time	Instant
System power W	11
Unit	mm
Weight	0,2

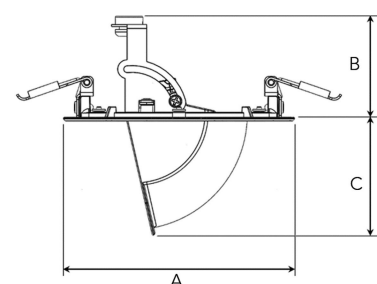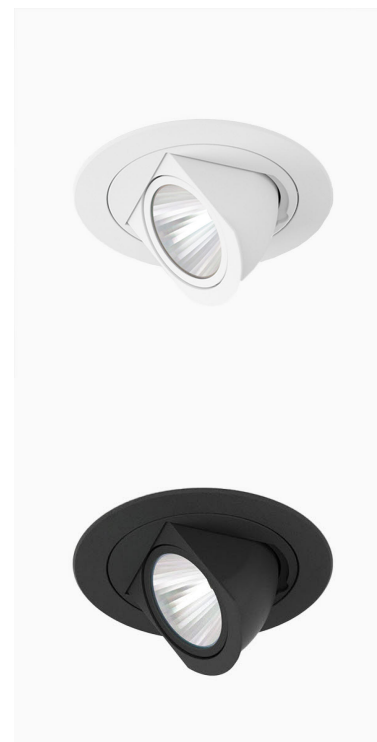

A= 118mm, B= 56mm, C= 61mm

Spot	Medium	Flood	Wide Flood
15°	27°	36°	56°
m	m	m	m
0	0	0	0
1.0	0.26	0.47	0.65
2.0	0.53	0.95	1.30
3.0	0.79	1.42	1.95
4.0	1.06	1.95	2.62
5.0	1.32	2.47	3.28
6.0	1.58	2.99	3.94
7.0	1.84	3.51	4.60
8.0	2.10	4.03	5.26
9.0	2.36	4.55	5.92
10.0	2.62	5.07	6.58
11.0	2.88	5.59	7.24
12.0	3.14	6.11	7.90
13.0	3.40	6.63	8.56
14.0	3.66	7.15	9.22
15.0	3.92	7.67	9.88
16.0	4.18	8.19	10.54
17.0	4.44	8.71	11.20
18.0	4.70	9.23	11.86
19.0	4.96	9.75	12.52
20.0	5.22	10.27	13.18
21.0	5.48	10.79	13.84
22.0	5.74	11.31	14.50
23.0	6.00	11.83	15.16
24.0	6.26	12.35	15.82
25.0	6.52	12.87	16.48
26.0	6.78	13.39	17.14
27.0	7.04	13.91	17.80
28.0	7.30	14.43	18.46
29.0	7.56	14.95	19.12
30.0	7.82	15.47	19.78
31.0	8.08	15.99	20.44
32.0	8.34	16.51	21.10
33.0	8.60	17.03	21.76
34.0	8.86	17.55	22.42
35.0	9.12	18.07	23.08
36.0	9.38	18.59	23.74
37.0	9.64	19.11	24.40
38.0	9.90	19.63	25.06
39.0	10.16	20.15	25.72
40.0	10.42	20.67	26.38
41.0	10.68	21.19	27.04
42.0	10.94	21.71	27.70
43.0	11.20	22.23	28.36
44.0	11.46	22.75	29.02
45.0	11.72	23.27	29.68
46.0	11.98	23.79	30.34
47.0	12.24	24.31	31.00
48.0	12.50	24.83	31.66
49.0	12.76	25.35	32.32
50.0	13.02	25.87	32.98
51.0	13.28	26.39	33.64
52.0	13.54	26.91	34.30
53.0	13.80	27.43	34.96
54.0	14.06	27.95	35.62
55.0	14.32	28.47	36.28
56.0	14.58	28.99	36.94
57.0	14.84	29.51	37.60
58.0	15.10	30.03	38.26
59.0	15.36	30.55	38.92
60.0	15.62	31.07	39.58
61.0	15.88	31.59	40.24
62.0	16.14	32.11	40.90
63.0	16.40	32.63	41.56
64.0	16.66	33.15	42.22
65.0	16.92	33.67	42.88
66.0	17.18	34.19	43.54
67.0	17.44	34.71	44.20
68.0	17.70	35.23	44.86
69.0	17.96	35.75	45.52
70.0	18.22	36.27	46.18
71.0	18.48	36.79	46.84
72.0	18.74	37.31	47.50
73.0	19.00	37.83	48.16
74.0	19.26	38.35	48.82
75.0	19.52	38.87	49.48
76.0	19.78	39.39	50.14
77.0	20.04	39.91	50.80
78.0	20.30	40.43	51.46
79.0	20.56	40.95	52.12
80.0	20.82	41.47	52.78
81.0	21.08	41.99	53.44
82.0	21.34	42.51	54.10
83.0	21.60	43.03	54.76
84.0	21.86	43.55	55.42
85.0	22.12	44.07	56.08
86.0	22.38	44.59	56.74
87.0	22.64	45.11	57.40
88.0	22.90	45.63	58.06
89.0	23.16	46.15	58.72
90.0	23.42	46.67	59.38
91.0	23.68	47.19	60.04
92.0	23.94	47.71	60.70
93.0	24.20	48.23	61.36
94.0	24.46	48.75	62.02
95.0	24.72	49.27	62.68
96.0	24.98	49.79	63.34
97.0	25.24	50.31	64.00
98.0	25.50	50.83	64.66
99.0	25.76	51.35	65.32
100.0	26.02	51.87	65.98



108mm