
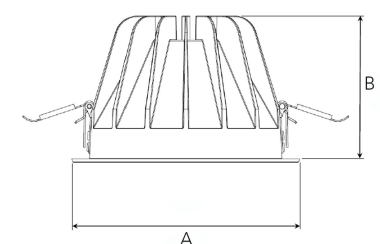


TITAN XL 5000, 930 (BBBL), SPOT W/ GLASS, WHITE ITAB

- ✓ Zorgt voor een discreet en geordend plafond.
- ✓ Niet-verblindend, comfortabel licht
- ✓ Verkrijgbaar in verschillende formaten en lumen-pakketten.
- ✓ Geen gereedschap nodig bij de installatie.
- ✓ Verkrijgbaar in drie kleuren: wit, zwart en grijs.

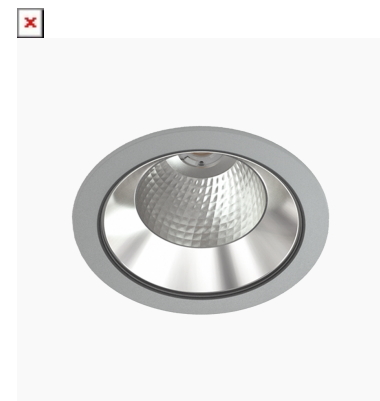

A= 195mm, B= 122mm

| Spot | 14° | | 26° | | 37° | | 55° | |
|------|------|------|------|------|------|------|------|------|
| | m | ø | m | ø | m | ø | m | ø |
| 1.0 | 0.24 | 0.47 | 0.47 | 0.68 | 1.05 | 1.05 | 2.10 | 2.10 |
| 2.0 | 0.48 | 0.94 | 0.94 | 1.35 | 2.10 | 2.10 | 3.15 | 3.15 |
| 3.0 | 0.72 | 1.41 | 1.41 | 2.03 | 3.15 | 3.15 | 4.73 | 4.73 |



178mm

TECHNICAL SPECIFICATION

| | |
|------------------------------|-----------------------|
| Product Code | 284-510-10 |
| Colour | White |
| Control | On/off |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 4584 |
| Driver | Stand alone, included |
| EEL | E |
| Light distribution | Spot |
| Lightsource | LED COB |
| Mains input voltage | 220-240 V |
| Measurements A | 195 |
| Measurements B | 122 |
| Mounting | Recessed |
| Position | Fixed |
| Lifetime | L80 B10, 50.000h |
| Protection | IP 20, class III |
| Sawing instructions diameter | 178 |
| Start Time | Instant |
| System power W | 37,9 |
| Unit | mm |
| Weight | 0,85 |