


# FIX 4000, 930 (BBBL), FLOOD W/ GLASS, GREY

ITAB

- ✓ Modern, minimalistisch und sauber wirkende Decke
- ✓ Verfügbar in verschiedenen Lumenpaketen
- ✓ Werkzeuglose Montage
- ✓ Erhältlich in Weiß, Schwarz und Grau

## TECHNICAL SPECIFICATION

|                           |                       |
|---------------------------|-----------------------|
| Product Code              | 306-03091130062       |
| Colour                    | Grey                  |
| Control                   | On/off                |
| CRI light colour          | 930 (BBBL)            |
| Delivered lumen output lm | 3766                  |
| Driver                    | Stand alone, included |
| EEL                       | E                     |
| Light distribution        | Flood                 |
| Lightsource               | LED COB               |
| Mains input voltage       | 220-240 V             |
| Measurements A            | 202                   |
| Measurements B            | 70                    |
| Measurements C            | 202                   |
| Mounting                  | Recessed              |
| Position                  | Fixed                 |
| Lifetime                  | L80 B10, 50.000h      |
| Protection                | IP 20, class III      |
| Sawing instructions x     | 177                   |
| Sawing instructions y     | 191                   |
| Start Time                | Instant               |
| System power W            | 30,1                  |
| Unit                      | mm                    |
| Weight                    | 0,8                   |

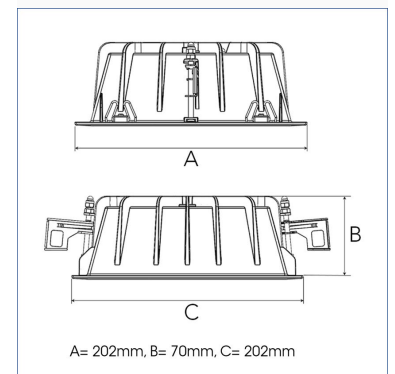

| Spot | Medium |     | Flood |     | Wide Flood |     |
|------|--------|-----|-------|-----|------------|-----|
|      | m      | °   | m     | °   | m          | °   |
| 1.0  | 0.25   | 14° | 0.48  | 27° | 0.69       | 38° |
| 2.0  | 0.49   |     | 0.95  |     | 1.39       |     |
| 3.0  | 0.74   |     | 1.43  |     | 2.08       |     |
| 1.0  | 0.25   | 14° | 0.48  | 27° | 0.69       | 38° |
| 2.0  | 0.49   |     | 0.95  |     | 1.39       |     |
| 3.0  | 0.74   |     | 1.43  |     | 2.08       |     |
| 1.0  | 0.25   | 14° | 0.48  | 27° | 0.69       | 38° |
| 2.0  | 0.49   |     | 0.95  |     | 1.39       |     |
| 3.0  | 0.74   |     | 1.43  |     | 2.08       |     |



177 x 191mm