


FLEX II 1500, 930 (BBBL), MEDIUM-SPOT, WHITE

ITAB

- ✓ Moderne og minimalistisk downlight som bevarer et rent uttrykk i himlingen.
- ✓ Tilgjengelig i forskjellige lumenpakker
- ✓ Verktøyfri installasjon
- ✓ Tilgjengelig i fargene hvit, svart og grå
- ✓ Uttrekkbar og roterende

TECHNICAL SPECIFICATION

Product Code	306-21041AA0062
Colour	White
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	2 x 1266
Driver	Stand alone, included
EEL	E
Light distribution	Medium-Spot
Lightsources	LED COB
Mains input voltage	220-240V
Measurements A	202
Measurements B	179
Measurements C	363
Measurements D	70
Mounting	Recessed
Position	360°/60°
Lifetime	L80 B10 50.000h
Protection	IP 20, class III
Sawing instructions unit	mm
Sawing instructions x	352
Sawing instructions y	177
Start Time	Instant
System power W	2 x 9,3
Unit	mm
Weight	1,9

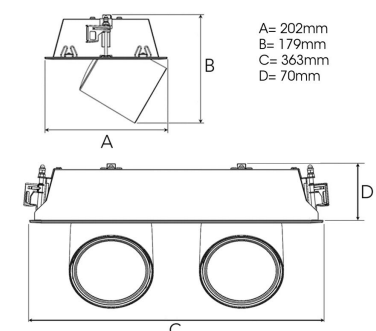

Spot	Medium	Flood	Wide Flood
14°	27°	38°	56°
m	m	m	m
1.0	1.0	1.0	1.0
2.0	2.0	2.0	2.0
3.0	3.0	3.0	3.0
0.25	0.48	0.69	1.07
0.49	0.95	1.39	2.14
0.74	1.43	2.08	3.22



177 x 352mm