


ORION I 1500, 930, SPOT, RETRO, WHITE

ITAB

- ✓ Diskret och prydligt tak
- ✓ Vrid lampan upp till 30° i valfri riktning
- ✓ Tillgänglig i vitt, svart och grått

TECHNICAL SPECIFICATION

| | |
|---------------------------|-----------------------|
| Product Code | 300-503-11 |
| Colour | White |
| Control | On/off |
| CRI light colour | 930 |
| Delivered lumen output lm | 1266 |
| Driver | Stand alone, included |
| EEL | E |
| Light distribution | Spot |
| Lightsource | LED COB |
| Mains input voltage | 220-240V |
| Measurements A | 165 |
| Measurements B | 158 |
| Measurements C | 103 |
| Mounting | Recessed |
| Position | 360°/30° |
| Lifetime | L80 B10 50.000h |
| Protection | IP 20, class III |
| Sawing instructions unit | mm |
| Sawing instructions x | 157 |
| Sawing instructions y | 150 |
| Start Time | Instant |
| System power W | 9,3 |
| Unit | mm |
| Weight | 0,9 |

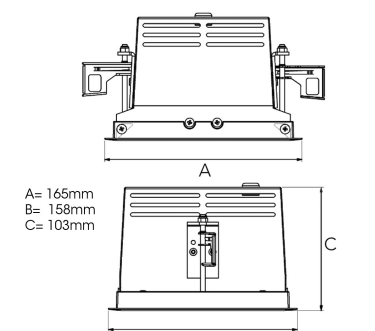

A= 165mm
B= 158mm
C= 103mm

| Spot | | Medium | | Flood | | Wide Flood | |
|------|------|--------|------|-------|------|------------|------|
| 16° | | 28° | | 40° | | 65° | |
| m | ø | m | ø | m | ø | m | ø |
| 1.0 | 0.28 | 1.0 | 0.50 | 1.0 | 0.73 | 1.0 | 1.28 |
| 2.0 | 0.56 | 2.0 | 1.00 | 2.0 | 1.46 | 2.0 | 2.56 |
| 3.0 | 0.83 | 3.0 | 1.51 | 3.0 | 2.18 | 3.0 | 3.84 |



157 x 150mm