

Amber mini NA 1500, 930 (BBBL), Spot, Black


ITAB

- ✓ Product is title 24 compatible
- ✓ Discrete and clean looking ceiling
- ✓ Available in various sizes and lumen packages
- ✓ Available in white, black and grey
- ✓ Retractable and rotating



Technical specification

| | |
|------------------------------|-----------------------|
| Product Code | 296-7500-20 |
| Colour | Black |
| Control | 0-10 V |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 1380 |
| Driver | Stand alone, included |
| Light distribution | Spot |
| Lightsource | LED COB |
| Mains input voltage | 120-277V |
| Measurements A | 5,3 |
| Measurements B | 13,6 |
| Measurements C | 5,8 |
| Measurements D | 14,5 |
| Measurements E | 15,9 |
| Mounting | Recessed |
| Position | 360°/60° |
| Lifetime | L80 B10, 50.000h |
| Protection | For indoor use only |
| Sawing instructions diameter | 4,89 |
| Sawing instructions unit | inch |
| Start Time | Instant |
| System power W | 12 |
| Unit | inch |

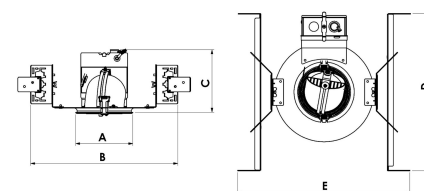

A= 5,3in B= 13,6in C= 5,8in D= 14,5in E= 15,9in

| Spot | Medium | Flood | Wide Flood |
|------|--------|-------|------------|
| 16° | 28° | 40° | 65° |
| m | m | m | m |
| 1.0 | 1.0 | 1.0 | 1.0 |
| 2.0 | 2.0 | 2.0 | 2.0 |
| 3.0 | 3.0 | 3.0 | 3.0 |
| 0.28 | 0.50 | 0.73 | 1.28 |
| 0.56 | 1.00 | 1.46 | 2.56 |
| 0.83 | 1.51 | 2.18 | 3.84 |