

ZEN MINI 3000, 930, W/O GLASS, SPOT, WHITE


ITAB

- ✓ Product is title 24 compatible
- ✓ Delivered standard with Nordic Light 1 circuit adapter. Alternatively available with J or L 1C adapters and NL 3 C adapter
- ✓ Four different beam angles for the light distribution
- ✓ Highly efficient chip onboard LED light source
- ✓ Available in white, black and grey



TECHNICAL SPECIFICATION

Product Code	325-01071514314
Colour	White
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	2700
Driver	Built in
EEI	E
Light distribution	Flood
Lightsource	LED COB
Mains input voltage	120V
Measurements A	7,65
Measurements B	5,3
Measurements C	3,4Ø
Measurements D	6,45
Mounting	Track
Position	360°/90°
Lifetime	L80 B10 50.000h
Protection	IP 20, class I
Sawing instructions unit	Inch
Start Time	Instant
System power W	19,4
Unit	inch
Weight	1,43

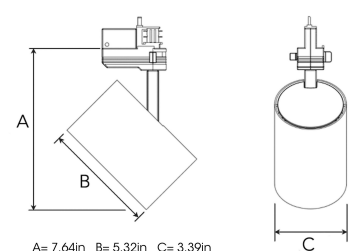

Spot	Medium	Flood	Wide Flood
18°	31°	42°	60°
m	m	m	m
1.0	1.0	1.0	1.0
2.0	2.0	2.0	2.0
3.0	3.0	3.0	3.0
0.31	0.52	0.76	1.16
0.62	1.05	1.52	2.32
0.93	1.57	2.28	3.48