


MOON MICRO 1200, 930 (BBBL), MEDIUM, GREY

ITAB

- ✓ Discreet and clean-looking ceiling
- ✓ Available in various sizes and lumen packages
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Small, tiltable and rotating

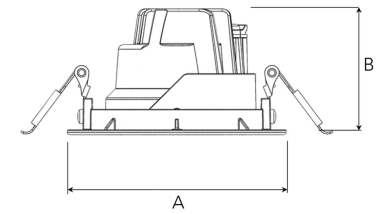

A= 87mm B= 54mm

| Spot | 15° | Medium | 27° | Flood | 36° | Wide Flood | 56° | |
|------|-----|--------|-----|-------|-----|------------|-----|------|
| | m | ø | m | ø | m | ø | m | ø |
| | 1.0 | 0.26 | 1.0 | 0.47 | 1.0 | 0.65 | 1.0 | 1.06 |
| | 2.0 | 0.53 | 2.0 | 0.95 | 2.0 | 1.30 | 2.0 | 2.12 |
| | 3.0 | 0.79 | 3.0 | 1.42 | 3.0 | 1.95 | 3.0 | 3.18 |

TECHNICAL SPECIFICATION

| | |
|------------------------------|-----------------------|
| Product Code | 345-501-30 |
| Colour | Grey |
| Control | On/off |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 1150 |
| Driver | Stand alone, included |
| EEL | E |
| Light distribution | Medium |
| Lightsource | LED COB |
| Mains input voltage | 220-240 V |
| Measurements A | 87 |
| Measurements B | 54 |
| Mounting | Recessed |
| Position | 360°/35° |
| Lifetime | L80 B10, 50.000h |
| Protection | IP 20, class III |
| Sawing instructions diameter | 81 |
| Start Time | Instant |
| System power W | 11 |
| Unit | mm |
| Weight | 0,25 |



81mm