


FLEX II 4000, 930 (BBBL), SPOT, BLACK

ITAB

- ✓ Modern, minimalistic and clean-looking ceiling
- ✓ Available in various lumen packages
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Tiltable and rotating

TECHNICAL SPECIFICATION

Product Code	306-550-20
Colour	Black
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	2 x 3850
Driver	Stand alone, included
EEL	E
Light distribution	Spot
Lightsource	LED COB
Mains input voltage	220-240 V
Measurements A	202
Measurements B	179
Measurements C	363
Measurements D	70
Mounting	Recessed
Position	360°/60°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions x	177
Sawing instructions y	352
Start Time	Instant
System power W	2 x 35,2
Unit	mm
Weight	1,9

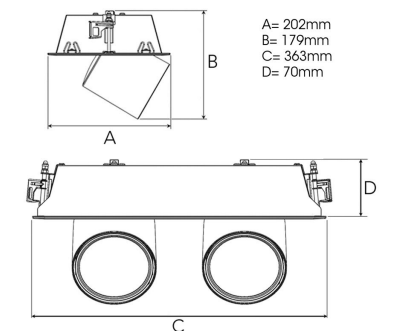

A= 202mm
B= 179mm
C= 363mm
D= 70mm

Spot	Medium	Flood	Wide Flood
14°	27°	38°	56°
m	ø	m	ø
1.0	0.25	1.0	0.48
2.0	0.49	2.0	0.95
3.0	0.74	3.0	1.43
1.0	0.69	1.0	1.07
2.0	1.39	2.0	2.14
3.0	2.08	3.0	3.22



177 x 352mm