


FLEX III 3000, 930 (BBBL), SPOT W/ GLASS, GREY

ITAB

- ✓ Modern, minimalistic and clean-looking ceiling
- ✓ Available in various lumen packages
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Tiltable and rotating

TECHNICAL SPECIFICATION

Product Code	306-33071110062
Colour	Grey
Control	On/off
CRI light colour	930 (BBBL)
Delivered lumen output lm	3 x 2841
Driver	Stand alone, included
EEI	E
Light distribution	Spot
Lightsource	LED COB
Mains input voltage	220-240 V
Measurements A	202
Measurements B	179
Measurements C	523
Measurements D	70
Mounting	Recessed
Position	360°/60°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions x	177
Sawing instructions y	512
Start Time	Instant
System power W	3 x 21,6
Unit	mm
Weight	2.8

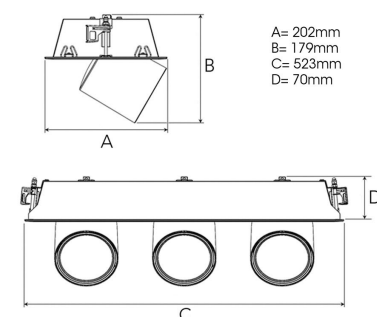

Spot	Medium	Flood	Wide Flood
14°	27°	38°	56°
m	m	m	m
0	0	0	0
1.0	0.25	0.48	0.69
2.0	0.49	0.95	1.39
3.0	0.74	1.43	2.08
4.0	0.99	1.91	2.77
5.0	1.24	2.39	3.46
6.0	1.49	2.87	4.15
7.0	1.74	3.35	4.84
8.0	1.99	3.83	5.53
9.0	2.24	4.31	6.22
10.0	2.49	4.79	6.91
11.0	2.74	5.27	7.60
12.0	2.99	5.75	8.29
13.0	3.24	6.23	8.98
14.0	3.49	6.71	9.67
15.0	3.74	7.19	10.36
16.0	3.99	7.67	11.05
17.0	4.24	8.15	11.74
18.0	4.49	8.63	12.43
19.0	4.74	9.11	13.12
20.0	4.99	9.59	13.81
21.0	5.24	10.07	14.50
22.0	5.49	10.55	15.19
23.0	5.74	11.03	15.88
24.0	5.99	11.51	16.57
25.0	6.24	11.99	17.26
26.0	6.49	12.47	17.95
27.0	6.74	12.95	18.64
28.0	6.99	13.43	19.33
29.0	7.24	13.91	20.02
30.0	7.49	14.39	20.71
31.0	7.74	14.87	21.40
32.0	7.99	15.35	22.09
33.0	8.24	15.83	22.78
34.0	8.49	16.31	23.47
35.0	8.74	16.79	24.16
36.0	8.99	17.27	24.85
37.0	9.24	17.75	25.54
38.0	9.49	18.23	26.23
39.0	9.74	18.71	26.92
40.0	9.99	19.19	27.61
41.0	10.24	19.67	28.30
42.0	10.49	20.15	28.99
43.0	10.74	20.63	29.68
44.0	10.99	21.11	30.37
45.0	11.24	21.59	31.06
46.0	11.49	22.07	31.75
47.0	11.74	22.55	32.44
48.0	11.99	23.03	33.13
49.0	12.24	23.51	33.82
50.0	12.49	23.99	34.51
51.0	12.74	24.47	35.20
52.0	12.99	24.95	35.89
53.0	13.24	25.43	36.58
54.0	13.49	25.91	37.27
55.0	13.74	26.39	37.96
56.0	13.99	26.87	38.65
57.0	14.24	27.35	39.34
58.0	14.49	27.83	40.03
59.0	14.74	28.31	40.72
60.0	14.99	28.79	41.41
61.0	15.24	29.27	42.10
62.0	15.49	29.75	42.79
63.0	15.74	30.23	43.48
64.0	15.99	30.71	44.17
65.0	16.24	31.19	44.86
66.0	16.49	31.67	45.55
67.0	16.74	32.15	46.24
68.0	16.99	32.63	46.93
69.0	17.24	33.11	47.62
70.0	17.49	33.59	48.31
71.0	17.74	34.07	49.00
72.0	17.99	34.55	49.69
73.0	18.24	35.03	50.38
74.0	18.49	35.51	51.07
75.0	18.74	35.99	51.76
76.0	18.99	36.47	52.45
77.0	19.24	36.95	53.14
78.0	19.49	37.43	53.83
79.0	19.74	37.91	54.52
80.0	19.99	38.39	55.21
81.0	20.24	38.87	55.90
82.0	20.49	39.35	56.59
83.0	20.74	39.83	57.28
84.0	20.99	40.31	57.97
85.0	21.24	40.79	58.66
86.0	21.49	41.27	59.35
87.0	21.74	41.75	60.04
88.0	21.99	42.23	60.73
89.0	22.24	42.71	61.42
90.0	22.49	43.19	62.11
91.0	22.74	43.67	62.80
92.0	22.99	44.15	63.49
93.0	23.24	44.63	64.18
94.0	23.49	45.11	64.87
95.0	23.74	45.59	65.56
96.0	23.99	46.07	66.25
97.0	24.24	46.55	66.94
98.0	24.49	47.03	67.63
99.0	24.74	47.51	68.32
100.0	24.99	47.99	69.01



177 x 512mm