


# FLEX III 1500, 930 (BBBL), SPOT-WIDE FLOOD-MEDIUM, WHITE

ITAB

- ✓ Modern, minimalistic and clean-looking ceiling
- ✓ Available in various lumen packages
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Tilttable and rotating

## TECHNICAL SPECIFICATION

|                           |                        |
|---------------------------|------------------------|
| Product Code              | 306-31041CB0062        |
| Colour                    | White                  |
| Control                   | On/off                 |
| CRI light colour          | 930 (BBBL)             |
| Delivered lumen output lm | 3 x 1266               |
| Driver                    | Stand alone, included  |
| EEL                       | E                      |
| Light distribution        | Spot-Wide Flood-Medium |
| Lightsource               | LED COB                |
| Mains input voltage       | 220-240V               |
| Measurements A            | 202                    |
| Measurements B            | 179                    |
| Measurements C            | 523                    |
| Measurements D            | 70                     |
| Mounting                  | Recessed               |
| Position                  | 360°/60°               |
| Lifetime                  | L80 B10 50.000h        |
| Protection                | IP 20, class III       |
| Sawing instructions unit  | mm                     |
| Sawing instructions x     | 177                    |
| Sawing instructions y     | 512                    |
| Start Time                | Instant                |
| System power W            | 3 x 9,3                |
| Unit                      | mm                     |
| Weight                    | 2,8                    |

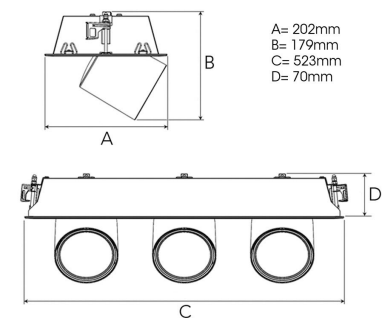

| Spot | Medium | Flood | Wide Flood |
|------|--------|-------|------------|
| 14°  | 27°    | 38°   | 56°        |
| m    | m      | m     | m          |
| o    | o      | o     | o          |
| 1.0  | 1.0    | 1.0   | 1.0        |
| 2.0  | 2.0    | 2.0   | 2.0        |
| 3.0  | 3.0    | 3.0   | 3.0        |
| 0.25 | 0.48   | 0.69  | 1.07       |
| 0.49 | 0.95   | 1.39  | 2.14       |
| 0.74 | 1.43   | 2.08  | 3.22       |



177 x 512mm