


# ZYLINDER MINI 1500, 930 (BBBL), SPOT W/ GLASS, BLACK

ITAB

- ✓ Pure and minimalistic/clean design
- ✓ Four different beam angles for the light distribution
- ✓ Incorporated electronic control gear
- ✓ Highly efficient 'chip on board' LED light source
- ✓ Available in white, black and grey

## TECHNICAL SPECIFICATION

|                           |                  |
|---------------------------|------------------|
| Product Code              | 298-500-20       |
| Colour                    | Black            |
| Control                   | On/off           |
| CRI light colour          | 930 (BBBL)       |
| Delivered lumen output lm | 1266             |
| Driver                    | Built in         |
| EEL                       | E                |
| Light distribution        | Spot             |
| Lightsource               | LED COB          |
| Mains input voltage       | 220-240 V        |
| Measurements A            | 87               |
| Measurements B            | 190              |
| Mounting                  | Track            |
| Position                  | 360°/90°         |
| Lifetime                  | L80 B10, 50.000h |
| Protection                | IP 20, class I   |
| Start Time                | Instant          |
| System power W            | 9                |
| Unit                      | mm               |
| Weight                    | 0,67             |

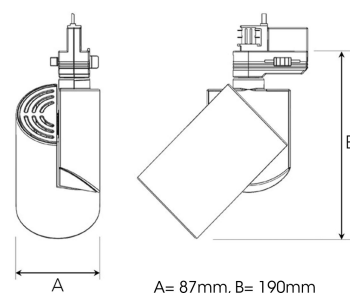

| Spot | Medium | Flood | Wide Flood |
|------|--------|-------|------------|
| 16°  | 28°    | 40°   | 65°        |
| m    | m      | m     | m          |
| 1.0  | 1.0    | 1.0   | 1.0        |
| 2.0  | 2.0    | 2.0   | 2.0        |
| 3.0  | 3.0    | 3.0   | 3.0        |
| 0.28 | 0.50   | 0.73  | 1.28       |
| 0.56 | 1.00   | 1.46  | 2.56       |
| 0.83 | 1.51   | 2.18  | 3.84       |