



ZEN EVO MINI, GREY, 2000, 930, FLOOD, 230V, IN TRACK

ITAB

- ✓ Very minimalistic/clean design
- ✓ Highly efficient chip on board LED light source and segmented reflector for maximum efficacy
- ✓ Integrated, highly efficient electronic control gear in the track adapter
- ✓ Highly efficient chip on board LED light source
- ✓ Available in white, black and grey.

TECHNICAL SPECIFICATION

| | |
|---------------------------|------------------|
| Product Code | 367-03051530013 |
| Colour | Grey |
| Control | On/off |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 1914 |
| Driver | Built in |
| EEL | E |
| Light distribution | Flood |
| Lightsource | LED COB |
| Mains input voltage | 220-240V |
| Measurements A | 86 |
| Measurements B | 106 |
| Measurements C | 164 |
| Measurements D | 206 |
| Mounting | Track |
| Position | 360°/90° |
| Lifetime | L80 B10, 50.000h |
| Protection | IP 20, class II |
| Start Time | Instant |
| System power W | 12,6 |
| Unit | mm |
| Weight | 0,49 |

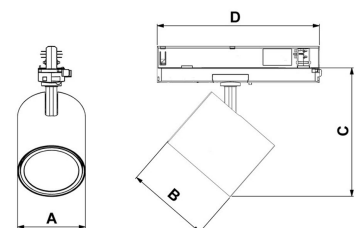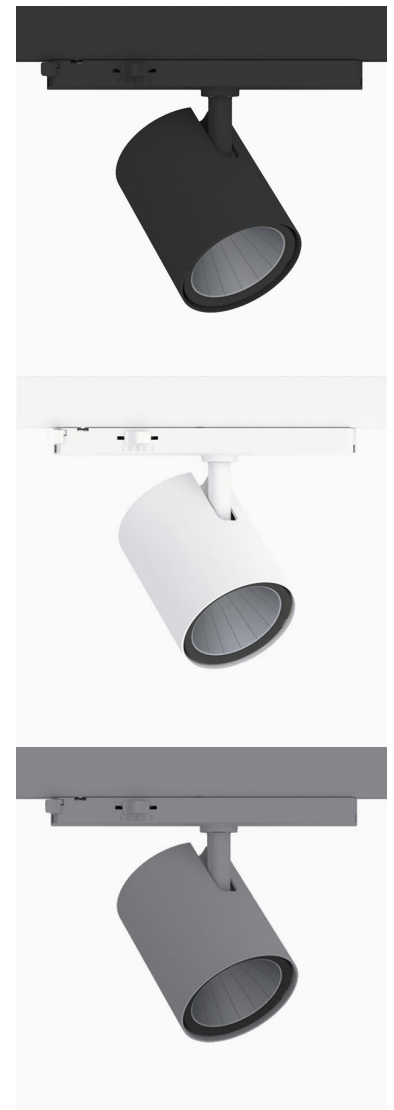

A= 86 mm, B= 106 mm, C= 164 mm, D= 206 mm

| Spot | Medium | Flood | Wide Flood |
|------|--------|-------|------------|
| 19° | 29° | 49° | 70° |
| m | m | m | m |
| 1.0 | 1.0 | 1.0 | 1.0 |
| 2.0 | 2.0 | 2.0 | 2.0 |
| 3.0 | 3.0 | 3.0 | 3.0 |
| 0.31 | 0.52 | 0.76 | 1.16 |
| 0.62 | 1.05 | 1.52 | 2.32 |
| 0.93 | 1.57 | 2.28 | 3.48 |