


SESAME

ITAB

- ✓ Consumers no longer need to scan receipt to validate exit.
- ✓ System verifies and allows exit only to paying customers
- ✓ Communicates with ITAB AlphaGate and ITAB SigmaGate
- ✓ Can be integrated to any POS system
- ✓ Increases security and removes friction

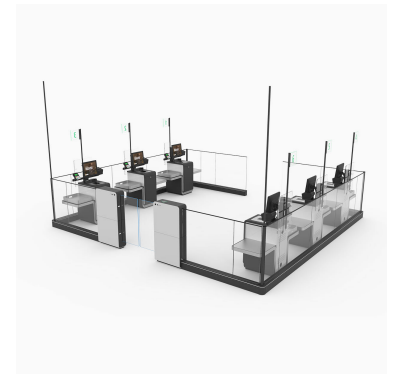

TECHNICAL SPECIFICATION

Certifications	CE
Voltage	100-240VAC 50-60Hz
Operating temperature	0-35° C
Communication	LAN/3G/4G
Customisable	Yes
Installation	indoor
Operating conditions	Indoor, max 80%