
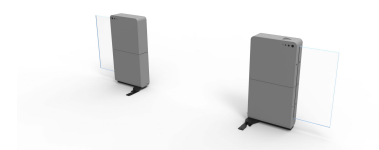
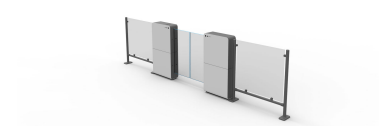
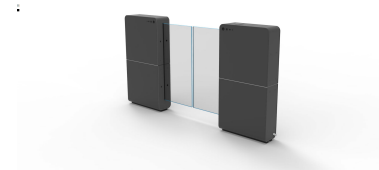


SIGMAGATE 1

ITAB

- ✓ Sliding doors take up minimal space
- ✓ Customisable to your design aesthetics
- ✓ Several triggers to open the gate
- ✓ Potential to integrate scanner
- ✓ Can be used with ITAB Sesame Solution

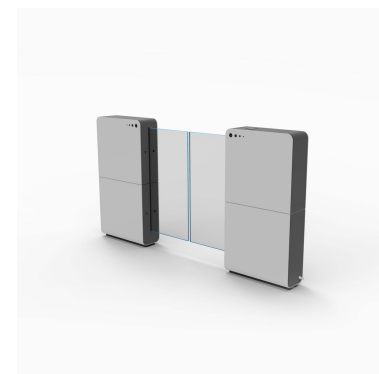

TECHNICAL SPECIFICATION

Dimensions HxLxW mm	Standard: 200x565x1105 MPB version: 305x565x1125
Weight kg	Standard: 88 kg MPB version: 96 kg
Certifications	CE
Voltage	115-240VAC 50-60Hz
Operating temperature	0-35° C
Automatic Panic Reset	Yes
Gate Arm options	Yes
LED light	Yes
Synchronized opening	Yes
Panic Alarm	Yes
Communication	Optional
Options	Remote control, overhead sensor, service desk switch, RFID reader
Customisable	Yes
Installation	Indoor
Scanners	Optional
Operating conditions	Indoor