


# MOON MINI 2500, 930, FLOOD W/ DIFFUSER COVER, BLACK



- ✓ Discreet and clean-looking ceiling
- ✓ Available in various sizes and lumen packages
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Tilttable and rotating

## TECHNICAL SPECIFICATION

|                              |                       |
|------------------------------|-----------------------|
| Product Code                 | 315-563-20            |
| Colour                       | Black                 |
| Control                      | On/off                |
| CRI light colour             | 930                   |
| Delivered lumen output lm    | 2468                  |
| Driver                       | Stand alone, included |
| EEL                          | E                     |
| Light distribution           | Wide flood            |
| Lightsource                  | LED COB               |
| Mains input voltage          | 220-240 V             |
| Measurements A               | 120                   |
| Measurements B               | 88                    |
| Measurements C               | 85                    |
| Mounting                     | Recessed              |
| Position                     | 360°/40°              |
| Lifetime                     | L80 B10, 50.000h      |
| Protection                   | IP 20, class III      |
| Sawing instructions diameter | 112                   |
| Start Time                   | Instant               |
| System power W               | 18,4                  |
| Unit                         | mm                    |
| Weight                       | 0.45                  |

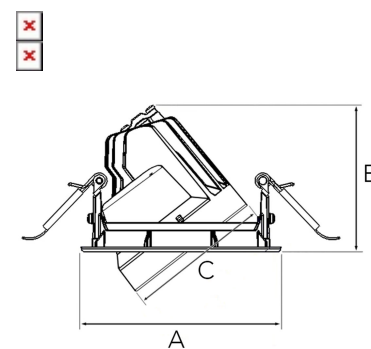

A= 120mm B= 88mm C= 85mm

| Spot | Medium |      | Flood |      | Wide Flood |      |       |
|------|--------|------|-------|------|------------|------|-------|
|      | 16°    | 28°  | 40°   | 65°  |            |      |       |
| m    | φ      | m    | φ     | m    | φ          | m    | φ     |
| 1.0  | 0.28   | 0.50 | 0.73  | 1.28 | 1.28       | 2.56 | 3.84  |
| 2.0  | 0.56   | 1.00 | 1.46  | 2.56 | 2.56       | 5.12 | 7.68  |
| 3.0  | 0.83   | 1.51 | 2.18  | 3.84 | 3.84       | 7.68 | 11.52 |



112mm