


ZYLINDER 4000, 930 (BBBL), SPOT W/ GLASS, WHITE



- ✓ Pure and minimalistic/clean design
- ✓ Four different beam angles for the light distribution
- ✓ Incorporated electronic control gear
- ✓ Highly efficient 'chip on board' LED light source
- ✓ Available in white, black and grey

TECHNICAL SPECIFICATION

| | |
|---------------------------|------------------|
| Product Code | 288-510-10 |
| Colour | White |
| Control | On/off |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 3766 |
| Driver | Built in |
| EEL | E |
| Light distribution | Spot |
| Lightsource | LED COB |
| Mains input voltage | 220-240 V |
| Measurements A | 103,5 |
| Measurements B | 227 |
| Mounting | Track |
| Position | 360°/90° |
| Lifetime | L80 B10, 50.000h |
| Protection | IP 20, class I |
| Start Time | Instant |
| System power W | 30,1 |
| Unit | mm |
| Weight | 0,91 |

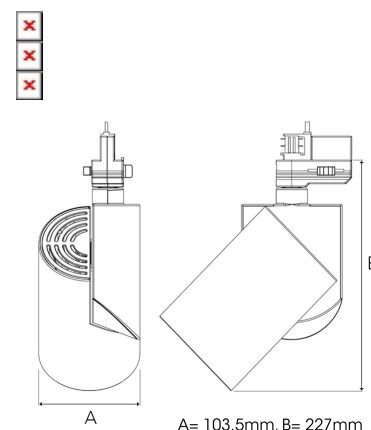

| Spot | Medium | Flood | Wide Flood |
|------|--------|-------|------------|
| 14° | 27° | 38° | 56° |
| m | m | m | m |
| 0 | 0 | 0 | 0 |
| 1.0 | 0.25 | 1.0 | 0.69 |
| 2.0 | 0.49 | 2.0 | 1.39 |
| 3.0 | 0.74 | 3.0 | 2.08 |
| 1.0 | 0.48 | 1.0 | 1.07 |
| 2.0 | 0.95 | 2.0 | 2.14 |
| 3.0 | 1.43 | 3.0 | 3.22 |